


Amplification *Taurus*

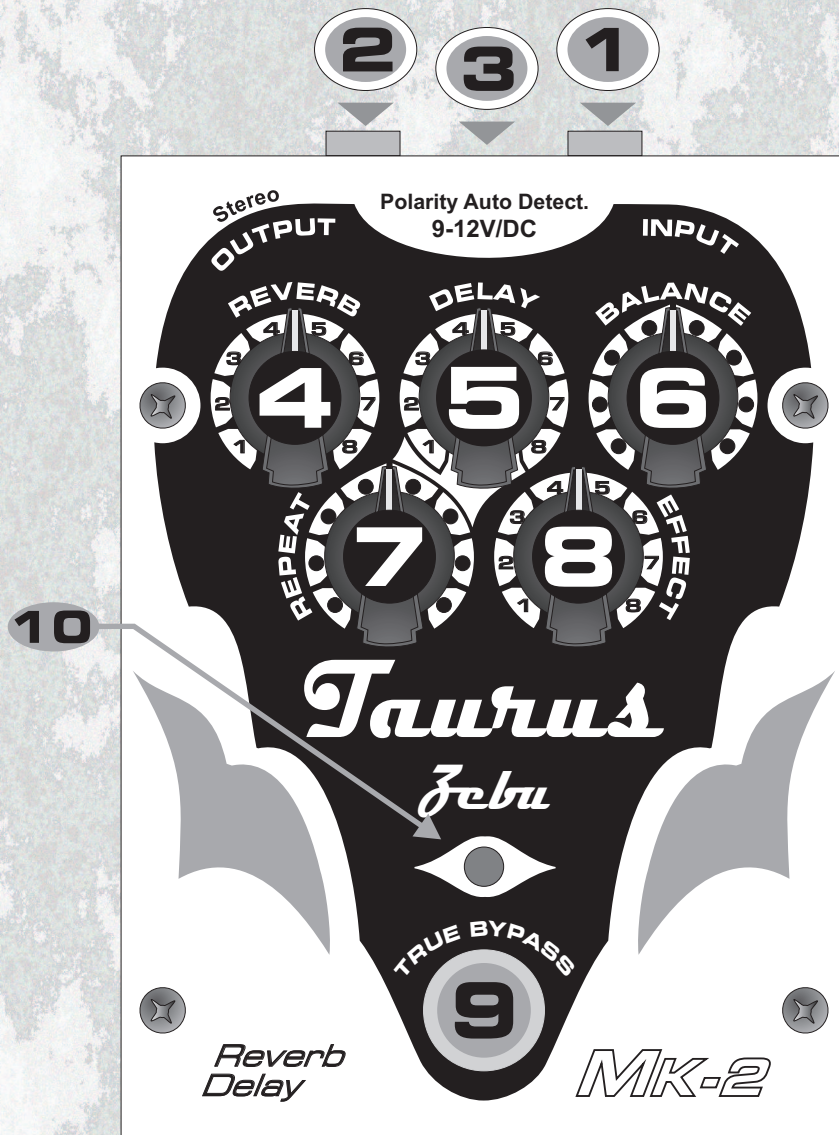

1. INPUT - mono 1/4" (jack) > impedance: 1M ohm
2. OUTPUT - stereo/mono 1/4" (jack) > impedance: 1K ohm
3. POWER SUPPLY INPUT - DC 9-12V /polarity supply auto detection
4. REVERB - time range (0.5 -10s)
5. DELAY - time range (50-1000ms) 60bpm - 1200bpm
6. BALANCE - mix between REVERB and DELAY
7. REPEAT - controls the number of repeats (feedback) in the DELAY effect - (0-90%)
8. EFFECT - determines the overall signal level of DELAY and REVERB effect.
9. FOOT SWITCH - true-bypass when on the "Off "
10. Effect „ON" indicator